



BUREAU  
VERITAS

# LAB REPORT

<b>Report number</b>	(6625)056-1023		
<b>Date of sampling (dd/mm/yyyy)</b>	25/02/2025		
<b>Date of report (dd/mm/yyyy)</b>	06/03/2025		
<b>Factory company name</b>	Shandong Huashing Innovative Textile Technology Co.,Ltd		
<b>Factory address</b>	Xinghu 5th Road, Wudi County Economic Development Zone, Binzhou City, Shandong Province, China		
<b>Discharge type</b>	Indirect Discharge with Pretreatment		
<b>Discharge destination name &amp; address</b>	Urban sewage treatment plant (Shandong Hongfu Water Co., Ltd.)		
<b>Average total industrial wastewater generated</b>	≥15 m <sup>3</sup> per day	<b>Manufacturing process type</b>	Textile
<b>Onsite ETP / Pretreatment</b>	Yes	<b>Homogenization Tank &amp; Average Holding Time</b>	Yes (raw & effluent), >12h
<b>ZDHC sampler accreditation certification number</b>	C74D106818121		
<b>Sample description &amp; Sample collection method</b>			
<b>Untreated wastewater (raw)</b>	I001, dark blue liquid, grab sample at 8:30		
<b>Discharged wastewater (effluent)</b>	I002, light brown liquid, grab sample at 9:10		
<b>Sludge</b>	I003, brown black solid, composite sample at 10:00		
<b>Local legal data</b>			
<b>Local legal standard name &amp; number [a]</b>	Implementation standards for wastewater pollutant discharge		
<b>Parameters (ZDHC WWG V2.2, Table 2 &amp; 3) exceeded local regulation</b>	Not applicable		
<b>Discharge permit provided</b>	Yes		
<b>ZDHC overall results</b>			
<b>Wastewater MRSL</b>	Not detected		
<b>Wastewater metals</b>	Meet aspirational limit		
<b>Wastewater conventional and anions</b>	Not applicable		
<b>Sludge disposal pathway</b>	C	<b>Sludge</b>	Sample and report only



Internal Description	
Sample reference number	(6625)056-1023
Date & time of the beginning of sampling	25/02/2025, 08:00
Date & time of the end of sampling	25/02/2025, 11:30
Sample received date	26/02/2025
Testing period	From 25/02/2025 to 06/03/2025
Sample holding time exceeded	No
Sample temperature when received from lab	1.88 °C
Comments	Samples received within holding time and temperature.

If there are questions or concerns on this report, please contact the following persons:

**General enquiry and invoicing**

Mr. Henry Chen

Email: henry.chen@bureauveritas.com; Tel: (021) 24081953

**Technical enquiry**

Mr. Steven Han

Email: steven-z.han@bureauveritas.com; Tel: (021) 24081838

For and on behalf of  
BUREAU VERITAS CONSUMER PRODUCTS SERVICES DIVISION (SHANGHAI)

Amy Feng

Aten Wu, Technical Support

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests



BUREAU  
VERITAS

Report Number (6625)056-1023

**Summary of test results**

Wastewater / MRSL - Test Items	Raw 1001
AP and APEOs	ND
Antimicrobials and Biocides	ND
Chlorinated Paraffins	ND
Chlorobenzenes and Chlorotoluenes	ND
Chlorophenols	ND
DMFa	ND
Dyes-Carcinogenic or Equivalent Concern	ND
Dyes-Disperse (Allergenic)	ND
Dyes-Navy Blue Colourant	NA
Flame Retardants	ND
Glycols / Glycol Ethers	ND
Halogenated Solvents	ND
Organotin Compounds	ND
Other / Miscellaneous Chemicals	ND
PFCs	ND
Phthalates	ND
PAHs	ND
Restricted Aromatic Amines	ND
UV Absorbers	ND
VOC	ND



BUREAU  
VERITAS

Report Number (6625)056-1023

**Summary of test results**

<b>Wastewater / Metals - Test Items</b>	<b>Effluent I002</b>
Antimony	NA
Chromium (VI)	Meet aspirational
Barium	NA
Selenium	NA
Tin	NA
Arsenic	Meet aspirational
Total Chromium	NA
Cobalt	NA
Cadmium	Meet aspirational
Copper	NA
Lead	Meet aspirational
Nickel	NA
Silver	NA
Zinc	NA
Mercury	Meet aspirational
<b>Wastewater / Conventional &amp; Anions - Test Items</b>	<b>Effluent I002</b>
pH [f]	NA
Temperature difference [f]	NA
E.coli	NA
Colour	NA
Persistent foam [f]	NA
Wastewater flowrate [f]	NA
Ammonium-Nitrogen	NA
AOX	NA
BOD5	NA
COD	NA
DO [f]	NA
Oil & Grease	NA
Total Phenols	NA
Total Chlorine [f]	NA
TDS	NA
Total Nitrogen	NA
Total Phosphorus	NA
TSS	NA
Chloride	NA
Cyanide, total	NA
Sulphate	NA
Sulphide	NA
Sulphite	NA



**Summary of test results**      **Sludge Disposal Pathway = C**

Sludge / Sludge Parameters - Test Items	Sludge I003
AP and APEOs	Report only
PAHs	Report only
Chlorotoluenes	Report only
Antimony	NA
Arsenic	NA
Barium	NA
Cadmium	NA
Cobalt	NA
Copper	NA
Lead	NA
Nickel	NA
Selenium	NA
Silver	NA
Zinc	NA
Total Chromium	NA
Chromium (VI)	NA
Mercury	NA
pH	NA
Fecal Coliform	NA
% Solids	Report only
Paint Filter Test	NA
Cyanide	NA

Sludge flux and/or sludge flow data: NA

Remark (indicated in each parameter)		
ND	=	Not detected (below lab reporting limit)
D	=	Detected (above lab reporting limit)
Exceed foundational	=	Parameter exceeds the foundational limit
Meet foundational	=	Parameter meets the foundational limit
Meet progressive	=	Parameter meets the progressive limit
Meet aspirational	=	Parameter meets the aspirational limit
Report only	=	Parameter is for report only, please refer to the data
NA	=	Not applicable
Meet disposal pathway	=	Parameter meets the sludge disposal pathway limit
Exceed disposal pathway	=	Parameter exceeds the sludge disposal pathway limit
[a]	=	The local legal standard name and legal standard number is referenced to discharge permit (or contractual agree by CETP) that provided by company.
(f)	=	Parameter tested in field
(T)	=	Handling temperature exceeded
@	=	Maximum holding time exceeded
*	=	See remark
(S)	=	Analysis was subcontracted for testing



1) Test result - Wastewater / MRSL
1A) AP and APEOs: including all isomers

NP/OP: ASTM D7065-17; OPEO/NPEO (n>2): ASTM D7742-17, LC-MS

Table with 4 main rows for NPEO, NP, OPEO, and OP, showing CAS numbers, reporting limits for textile and lab, and raw data results (all ND).

1B) Anti-Microbials & Biocides

USEPA3510C:1996; USEPA 8270E:2018, GC-MS; USEPA 8321B:2007, LC-MS

Table with 3 rows for o-Phenylphenol, Triclosan, and Permethrin, showing CAS numbers, reporting limits, and raw data results (all ND).

1C) Chlorinated Parafins

USEPA 3510C:1996; ISO 18219-2:2021, GC-MS

Table with 2 rows for MCCPs and SCCPs, showing CAS numbers, reporting limits, and raw data results (all ND).

**1D) Chlorobenzenes and Chlorotoluenes**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
1,2-dichlorobenzene	95-50-1	0.2	0.2	ND			
Other isomers of mono-, di-, tri-, tetra-, penta-, and hexa- chlorobenzene and mono-, di-, tri-, tetra-, and penta- chlorotoluene	Multiple 108-90-7, 541-73-1, 106-46-7, 87-61-6, 120-82-1, 108-70-3, 634-66-2, 634-90-2, 95-94-3, 608-93-5, 118-74-1, 95-49-8, 108-41-8, 106-43-4, 32768-54-0, 95-73-8, 19398-61-9, 118-69-4, 95-75-0, 25186-47-4, 7359-72-0, 2077-46-5, 6639-30-1, 23749-65-7, 21472-86-6, 1006-32-2, 875-40-1, 1006-31-1, 877-	0.2	0.2	ND			

**1E) Chlorophenols**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
2-chlorophenol	95-57-8	0.5	0.5	ND			
2,3-dichlorophenol	576-24-9	0.5	0.5	ND			
2,3,4-trichlorophenol	15950-66-0	0.5	0.5	ND			
2,3,5-trichlorophenol	933-78-8	0.5	0.5	ND			
2,3,6-trichlorophenol	933-75-5	0.5	0.5	ND			
2,4-dichlorophenol	120-83-2	0.5	0.5	ND			
2,4,5-trichlorophenol	95-95-4	0.5	0.5	ND			
2,4,6-trichlorophenol	88-06-2	0.5	0.5	ND			
2,5-dichlorophenol	583-78-8	0.5	0.5	ND			
2,6-dichlorophenol	87-65-0	0.5	0.5	ND			
3-chlorophenol	108-43-0	0.5	0.5	ND			
3,4-dichlorophenol	95-77-2	0.5	0.5	ND			
3,4,5-trichlorophenol	609-19-8	0.5	0.5	ND			
3,5-dichlorophenol	591-35-5	0.5	0.5	ND			
4-chlorophenol	106-48-9	0.5	0.5	ND			
Pentachlorophenol (PCP)	87-86-5	0.5	0.5	ND			
2,3,5,6-tetrachlorophenol	935-95-5	0.5	0.5	ND			
2,3,4,6-tetrachlorophenol	58-90-2	0.5	0.5	ND			
2,3,4,5-tetrachlorophenol	4901-51-3	0.5	0.5	ND			

**1F) N,N-di-methylformamide (DMFa)**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
Dimethyl formamide; N,N-dimethylformamide (DMFa)	68-12-2	1000	1000	ND			



**1G) Dyes - Carcinogenic or Equivalent Concern**

USEPA 8321B:2007, LC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
Basic violet 3 with >0.1% of Michler's Ketone	548-62-9	500	500	ND			
C.I. Acid Red 26	3761-53-3	500	500	ND			
C.I. Acid Violet 49	1694-09-3	500	500	ND			
C.I. Basic Blue 26 (with Michler's Ketone >0.1%)	2580-56-5	500	500	ND			
C.I. Basic Green 4 (Malachite Green Chloride)	569-64-2	500	500	ND			
C.I. Basic Green 4 (Malachite Green Oxalate)	2437-29-8	500	500	ND			
C.I. Basic Green 4 (Malachite Green)	10309-95-2	500	500	ND			
C.I. Basic Red 9	569-61-9	500	500	ND			
C.I. Basic Violet 14	632-99-5	500	500	ND			
C.I. Direct Black 38	1937-37-7	500	500	ND			
C.I. Direct Blue 6	2602-46-2	500	500	ND			
C.I. Direct Red 28	573-58-0	500	500	ND			
C.I. Disperse Blue 1	2475-45-8	500	500	ND			
C.I. Disperse Blue 3	2475-46-9	500	500	ND			
C.I. Disperse Orange 11	82-28-0	500	500	ND			

**1H) Dyes - Disperse (Allergenic)**

USEPA 8321B:2007, LC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
Disperse Blue 102	12222-97-8	50	50	ND			
Disperse Blue 106	12223-01-7	50	50	ND			
Disperse Blue 124	61951-51-7	50	50	ND			
Disperse Blue 26	3860-63-7	50	50	ND			
Disperse Blue 35	12222-75-2	50	50	ND			
Disperse Blue 35	56524-77-7	50	50	ND			
Disperse Blue 7	3179-90-6	50	50	ND			
Disperse Brown 1	23355-64-8	50	50	ND			
Disperse Orange 1	2581-69-3	50	50	ND			
Disperse Orange 3	730-40-5	50	50	ND			
Disperse Orange 37/59/76	13301-61-6	50	50	ND			
Disperse Red 1	2872-52-8	50	50	ND			
Disperse Red 11	2872-48-2	50	50	ND			
Disperse Red 17	3179-89-3	50	50	ND			
Disperse Yellow 1	119-15-3	50	50	ND			
Disperse Yellow 3	2832-40-8	50	50	ND			
Disperse Yellow 39	12236-29-2	50	50	ND			
Disperse Yellow 49	54824-37-2	50	50	ND			
Disperse Yellow 9	6373-73-5	50	50	ND			

**1I) Dyes - Navy Blue Colourant**

USEPA 8321B:2007, LC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
Component 1: C <sub>39</sub> H <sub>23</sub> Cl-CrN <sub>7</sub> O <sub>12</sub> S <sub>2</sub> Na	118685-33-9						
Component 2: C <sub>46</sub> H <sub>30</sub> CrN <sub>10</sub> O <sub>20</sub> S <sub>2</sub> 3Na	Not allocated	NA	NA	NA			

**1J) Flame Retardants**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS; USEPA 8321B:2007, LC-MS; USEPA 3015A:2007; US EPA 6020B:2014, ICP-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
Boric acid	10043-35-3, 11113-50-1	500	500	ND			
Diboron trioxide	1303-86-2	500	500	ND			
Disodium octaborate	12008-41-2	500	500	ND			
Disodium tetraborate, anhydrous	1303-96-4, 1330-43-4	500	500	ND			
Tetraboron disodium heptaoxide, hydrate	12267-73-1	500	500	ND			
Hexabromocyclodecane (HBCDD)	3194-55-6	25	25	ND			
2,2-bis(bromomethyl)-1,3-propanediol (BBMP)	3296-90-0	25	25	ND			
Polybromobiphenyls (PBB)	59536-65-1	25	25	ND			
Monobromobiphenyls (MonoBB)	Multiple	25	25	ND			
Monobromodiphenylethers (MonoBDEs)	Multiple	25	25	ND			
Dibromobiphenyls (DiBB)	Multiple	25	25	ND			
Dibromopropylether	21850-44-2	25	25	ND			
Tribromophenylethers (TriBDEs)	Multiple	25	25	ND			
Tetrabromodiphenyl ether (TetraBDE)	40088-47-9	25	25	ND			
Pentabromodiphenyl ether (PentaBDE)	32534-81-9	25	25	ND			
Hexabromodiphenyl ether (HexaBDE)	36483-60-0	25	25	ND			
Heptabromodiphenyl ether (HeptaBDE)	68928-80-3	25	25	ND			
Octabromobiphenyls (OctaBB)	Multiple	25	25	ND			
Octabromodiphenyl ether (OctaBDE)	32536-52-0	25	25	ND			
Nonabromobiphenyls (NonaBB)	Multiple	25	25	ND			
Nonabromodiphenyl ether (NonaBDE)	63936-56-1	25	25	ND			
Decabromobiphenyl (DecaBB)	13654-09-6	25	25	ND			
Decabromophenyl ether (DecaBDE)	1163-19-5	25	25	ND			
Tetrabromobisphenol A (TBBPA)	79-94-7	25	25	ND			
Bis(2,3-dibromopropyl) phosphate (BDBPP)	5412-25-9	25	25	ND			
Tris-(2-chloro-1-methylethyl) phosphate (TCPP)	13674-84-5	25	25	ND			
Tris(1-aziridinyl) phosphine oxide (TEPA)	545-55-1	25	25	ND			
Tris(1,3-dichloro-isopropyl) phosphate (TDCP)	13674-87-8	25	25	ND			
Tris(2-chloroethyl) phosphate (TCEP)	115-96-8	25	25	ND			
Tris(2,3-dibromopropyl) phosphate (TRIS)	126-72-7	25	25	ND			

Footnote for boron flame retardant: Limit refers to the total elemental boron via ICP. If the total elemental boron content is higher than 500 µg/L, then all five boron flame retardant are non-conformant.



**1K) Glycols / Glycol Ethers**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
2-ethoxyethanol	110-80-5	50	50	ND			
2-ethoxyethyl acetate	111-15-9	50	50	ND			
2-methoxyethanol	109-86-4	50	50	ND			
2-methoxyethylacetate	110-49-6	50	50	ND			
2-methoxypropylacetate	70657-70-4	50	50	ND			
Bis(2-methoxyethyl)-ether	111-96-6	50	50	ND			
Ethylene glycol dimethyl ether	110-71-4	50	50	ND			
Triethylene glycol dimethyl ether	112-49-2	50	50	ND			

**1L) Halogenated Solvents**

USEPA 5030B:1996; EPA 8260D:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
1,2-dichloroethane	107-06-2	1	1	ND			
Methylene chloride	75-09-2	1	1	ND			
Tetrachloroethylene	127-18-4	1	1	ND			
Trichloroethylene	79-01-6	1	1	ND			

**1M) Organotin Compounds**

ISO 17353:2004 ,GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
Dipropyltin compounds (DPT)	Multiple 867-36-7	0.01	0.01	ND			
Mono, di-, and tri-butyltin derivatives	Multiple 1118-46-3, 1461-22-9	0.01	0.01	ND			
Mono, di-, and tri-methyltin derivatives	Multiple 993-16-8, 753-73-1, 1066-45-1	0.01	0.01	ND			
Mono, di-, and tri-octyltin derivatives	Multiple 3091-25-6, 3542-36-7, 2587-76-0	0.01	0.01	ND			
Mono, di-, and tri-phenyltin derivatives	Multiple 1124-19-2, 1135-99-5, 639-58-7	0.01	0.01	ND			
Tetrabutyltin compounds (TeBT)	Multiple 1461-25-2	0.01	0.01	ND			
Tetraethyltin compounds (TeET)	Multiple 597-64-8	0.01	0.01	ND			
Tetraoctyltin compounds (TeOT)	Multiple 3590-84-9	0.01	0.01	ND			
Tricyclohexyltin (TCyHT)	Multiple 3091-32-5	0.01	0.01	ND			
Tripropyltin compounds (TPT)	Multiple 2279-76-7	0.01	0.01	ND			



**1N) Other / Miscellaneous Chemicals**

USEPA 8321B:2007, LC-MS; USEPA 3015A:2007; US EPA 6020B:2014, ICP-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
AEEA [2-(2-aminoethylamino)ethanol]	111-41-1	500	500	ND			
Bisphenol A	80-05-7	10	10	ND			
Borate (Borate, zinc salt)	12767-90-7	100	100	ND			
Zinc salt (Borate, zinc salt)		100	100	ND			
Quinoline	91-22-5	50	50	ND			
Silica (particles of respirable size)	14464-46-1	NA	NA	NA			
Thiourea	62-56-6	50	50	ND			

Footnote for borate, zinc salt: Limit refers to boron and zinc individually, not the salt. Total boron and total zinc values should be less than 100 µg/L to be conformant. When total boron is >100 µg/L and total zinc is <100 µg/L (or vice versa), the sample is still conformant.

**1O) Perfluorinated and Polyfluorinated Chemicals (PFCs)**

USEPA 8321B: 2007, LC-MSMS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
Perfluorooctane sulfonate (PFOS) and related substances	Multiple 1763-23-1	0.01	0.01	ND			
Perfluorooctanoic acid (PFOA) and related substances	Multiple 335-67-1	1	1	ND			

**1P) Phthalates - including all other esters of ortho-phthalic acid**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
1,2-benzenedicarboxylic acid, di-C6-8 branched and linear alkyl esters, C7-rich (DIHP)	71888-89-6/ 84777-06-0	10	10	ND			
1,2-benzenedicarboxylic acid, di-C7-11 branched and linear alkyl esters (DHNU)	68515-42-4/ 68515-50-4	10	10	ND			
Bis(2-methoxyethyl)phthalate (DMEP)	117-82-8	10	10	ND			
Butyl benzyl phthalate (BBP)	85-68-7	10	10	ND			
Di-cyclohexyl phthalate (DCHP)	84-61-7	10	10	ND			
Di-iso-decyl phthalate (DIDP)	26761-40-0	10	10	ND			
Di-iso-octyl phthalate (DIOP)	27554-26-3	10	10	ND			
Di-iso-butyl phthalate (DIBP)	84-69-5	10	10	ND			
Di-iso-nonyl phthalate (DINP)	28553-12-0	10	10	ND			
Di-n-hexyl phthalate (DnHP)	84-75-3	10	10	ND			
Di-n-octyl phthalate (DNOP)	117-84-0	10	10	ND			
Di-n-pentylphthalates	131-18-0	10	10	ND			
Di-n-propyl phthalate (DPRP)	131-16-8	10	10	ND			
Di(ethylhexyl) phthalate (DEHP)	117-81-7	10	10	ND			
Dibutyl phthalate (DBP)	84-74-2	10	10	ND			
Diethyl phthalate (DEP)	84-66-2	10	10	ND			
Diisopentylphthalates	605-50-5	10	10	ND			
Dinonyl phthalate (DNP)	84-76-4	10	10	ND			



**1Q) Polycyclic Aromatic Hydrocarbons (PAHs)**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
Acenaphthene	83-32-9	1	1	ND			
Acenaphthylene	208-96-8	1	1	ND			
Anthracene	120-12-7	1	1	ND			
Benzo[a]anthracene	56-55-3	1	1	ND			
Benzo[a]pyrene	50-32-8	1	1	ND			
Benzo[b]fluoranthene	205-99-2	1	1	ND			
Benzo[e]pyrene	192-97-2	1	1	ND			
Benzo[ghi]perylene	191-24-2	1	1	ND			
Benzo[j]fluoranthene	205-82-3	1	1	ND			
Benzo[k]fluoranthene	207-08-9	1	1	ND			
Chrysene	218-01-9	1	1	ND			
Dibenz[a,h]anthracene	53-70-3	1	1	ND			
Fluoranthene	206-44-0	1	1	ND			
Fluorene	86-73-7	1	1	ND			
Indeno[1,2,3-cd]pyrene	193-39-5	1	1	ND			
Naphthalene	91-20-3	1	1	ND			
Phenanthrene	85-01-8	1	1	ND			
Pyrene	129-00-0	1	1	ND			

**1R) Restricted Aromatic Amines (Cleavable from Azo-colourants)**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
2-naphthylamine	91-59-8	0.1	0.1	ND			
2-naphthylammoniumacetate	553-00-4	0.1	0.1	ND			
2,4-xylidine	95-68-1	0.1	0.1	ND			
2,4,5-trimethylaniline	137-17-7	0.1	0.1	ND			
2,4,5-trimethylaniline hydrochloride	21436-97-5	0.1	0.1	ND			
2,6-xylidine	87-62-7	0.1	0.1	ND			
3',3'-dichlorobenzidine	91-94-1	0.1	0.1	ND			
3,3-dimethoxybenzidine	119-90-4	0.1	0.1	ND			
3,3-dimethylbenzidine	119-93-7	0.1	0.1	ND			
4-aminoazobenzene	60-09-3	0.1	0.1	ND			
4-aminodiphenyl	92-67-1	0.1	0.1	ND			
4-chloro-o-toluidine	95-69-2	0.1	0.1	ND			
4-chloro-o-toluidinium chloride	3165-93-3	0.1	0.1	ND			
4-chloroaniline	106-47-8	0.1	0.1	ND			
4-methoxy-m-phenylene diammonium sulphate; 2,4-diaminoanisole sulphate	39156-41-7	0.1	0.1	ND			
4-methoxy-m-phenylenediamine	615-05-4	0.1	0.1	ND			
4-methyl-m-phenylenediamine	95-80-7	0.1	0.1	ND			
4,4-methylene-bis-(2-chloro-aniline)	101-14-4	0.1	0.1	ND			
4,4-methylenedi-o-toluidine	838-88-0	0.1	0.1	ND			
4,4-methylenedianiline	101-77-9	0.1	0.1	ND			
4,4-oxydianiline	101-80-4	0.1	0.1	ND			
4,4-thiodianiline	139-65-1	0.1	0.1	ND			
5-nitro-o-toluidine	99-55-8	0.1	0.1	ND			
6-methoxy-m-toluidine	120-71-8	0.1	0.1	ND			
Benzidine	92-87-5	0.1	0.1	ND			
o-aminoazotoluene	97-56-3	0.1	0.1	ND			
o-anisidine	90-04-0	0.1	0.1	ND			
o-toluidine	95-53-4	0.1	0.1	ND			

**1S) UV Absorbers**

USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw 1001			
2-(2H-benzotriazol-2-yl)-4-(tert-butyl)-6-(sec-butyl) phenol (UV-350)	36437-37-3	100	100	ND			
2-(2H-benzotriazol-2-yl)-4,6-ditertpentylphenol (UV-328)	25973-55-1	100	100	ND			
2-benzotriazol-2-yl-4,6-di-tert-butylphenol (UV-320)	3846-71-7	100	100	ND			
2,4-Di-tert-butyl-6-(5-chlorobenzotriazole-2-yl) phenol (UV-327)	3864-99-1	100	100	ND			



BUREAU  
VERITAS

Report Number (6625)056-1023

**1T) Volatile Organic Compounds (VOC)**

USEPA 5030B:1996; EPA 8260D:2018; USEPA3510C:1996; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result (µg/L)			
		TEXTILE	Lab	Raw I001			
Benzene	71-43-2	1	1	ND			
m-cresol	108-39-4	1	1	ND			
o-cresol	95-48-7	1	1	ND			
p-cresol	106-44-5	1	1	ND			
Toluene	108-88-3	1	1	ND			
Xylene	1330-20-7	1	1	ND			



**2) Test result - Wastewater / Metals**

US EPA 3015A:2007; US EPA 6020B:2014, ICP-MS; GB/T 7467-1987, UV

Test Parameters	Reporting limit, TEXTILE				Legal limit#	Result (mg/L)			
	Foundational	Progressive	Aspirational	Lab		Effluent 1002			
Antimony	0.1	0.05	0.01	0.1	-	NA			
Chromium (VI)	0.05	0.005	0.001	0.001	-	ND			
Barium	Sample & report			-	-	NA			
Selenium	Sample & report			-	-	NA			
Tin	Sample & report			-	-	NA			
Arsenic	0.05	0.01	0.005	0.005	-	ND			
Total Chromium	0.2	0.1	0.05	0.05	-	NA			
Cobalt	0.05	0.02	0.01	0.01	-	NA			
Cadmium	0.1	0.05	0.01	0.01	-	ND			
Copper	1	0.5	0.25	0.25	-	NA			
Lead	0.1	0.05	0.01	0.01	-	ND			
Nickel	0.2	0.1	0.05	0.05	-	NA			
Silver	0.1	0.05	0.005	0.005	-	NA			
Zinc	5	1	0.5	0.5	-	NA			
Mercury	0.1	0.005	0.001	0.001	-	ND			

# Legal requirement based on regulation or standard information for discharged wastewater as well as the limitation value (or contractual limit value agreed by CETP) for the required parameters.



**3) Test result - Wastewater / Conventional and Anions**

Test Parameters	Test Method	Reporting limit, TEXTILE				Legal limit <sup>#</sup>	Result		Unit
		Foundational	Progressive	Aspirational	Lab		Effluent 1002		
pH	HJ 1147-2020	6-9			NA	-	NA		pH
Temperature difference	GB/T 13195-1991	Δ+15	Δ+10	Δ+5	NA	-	NA		°C
E.coli	SM 9221B, SM 9221F	126 MPN/100-ml			126	-	NA		MPN/100-ml
Colour (436 nm)	ISO 7887-B:2011	7	5	2	NA	-	NA		m-1
Colour (525 nm)		5	3	1	NA	-	NA		
Colour (620 nm)		3	2	1	NA	-	NA		
Persistent foam	Visual estimation	No indication of persistent foam in receiving water			NA	-	NA		-
Wastewater flowrate	-	15 m <sup>3</sup> /day			NA	-	NA		m <sup>3</sup> /day
Ammonium-Nitrogen	HJ 535-2009	10	1	0.5	0.5	-	NA		mg/L
AOX	HJ/T 83-2001	3	0.5	0.1	0.1	-	NA		mg/L
BOD <sub>5</sub>	HJ 505-2009	30	15	8	8	-	NA		mg/L
COD	HJ 828-2017	150	80	40	40	-	NA		mg/L
DO	HJ 506-2009	≥ 4			4	-	NA		mg/L
Oil & Grease	HJ 637-2018	10	2	0.5	0.5	-	NA		mg/L
Total Phenols / Phenol Index	HJ 503-2009	0.5	0.01	0.001	0.001	-	NA		mg/L
Total Chlorine	HJ 586-2010	1			-	-	NA		mg/L
TDS	GB/T 5750.4-2006	Sample & report			-	-	NA		mg/L

# Legal requirement based on regulation or standard information for discharged wastewater as well as the limitation value (or contractual limit value agreed by CETP) for the required parameters.

**3) Test result - Wastewater / Conventional and Anions (continue)**

Test Parameters	Test Method	Reporting limit, TEXTILE				Legal limit <sup>#</sup>	Result		Unit
		Foundational	Progressive	Aspirational	Lab		Effluent I002		
Total Nitrogen	HJ 636-2012	20	10	5	5	-	NA		mg/L
Total Phosphorus	GB/T 11893-1989	3	0.5	0.1	0.1	-	NA		mg/L
TSS	GB/T 11901-1989	50	15	5	5	-	NA		mg/L
Chloride	HJ 84-2016	Sample & report			-	-	NA		mg/L
Cyanide, total	HJ 484-2009	0.2	0.1	0.05	0.05	-	NA		mg/L
Sulphate	HJ 84-2016	Sample & report			-	-	NA		mg/L
Sulphide	HJ 1226-2021	0.5	0.05	0.01	0.01	-	NA		mg/L
Sulphite	HJ 84-2016	2	0.5	0.2	0.2	-	NA		mg/L

# Legal requirement based on regulation or standard information for discharged wastewater as well as the limitation value (or contractual limit value agreed by CETP) for the required parameters.



**4A) Test result - Sludge / MRSL  
Sludge - AP & APEOs**

Sludge Disposal Pathway = **C**

USEPA 3550C:2007; ASTM D7065-17; ASTM D7742-17, LC-MS

Test Parameters	CAS Number	Reporting Limit		Result			Unit
		TEXTILE	Lab	Sludge I003			
NPEO	Multiple 9016-45-9, 26027-38-3, 37205-87-1, 68412-54-4, 127087-87-0	0.4	0.4	ND			mg/kg
NP, mixed isomers	Multiple 104-40-5, 11066-49-2, 25154-52-3, 84852-15-3	0.4	0.4	ND			mg/kg
OPEO	Multiple 9002-93-1, 9036-19-5, 68987-90-6	0.4	0.4	ND			mg/kg
OP, mixed isomers	Multiple 140-66-9, 1806-26-4, 27193-28-8	0.4	0.4	ND			mg/kg

**Sludge - PAHs**

USEPA 3550C:2007; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result			Unit
		TEXTILE	Lab	Sludge I003			
Acenaphthene	83-32-9	0.2	0.2	ND			mg/kg
Acenaphthylene	208-96-8	0.2	0.2	ND			mg/kg
Anthracene	120-12-7	0.2	0.2	ND			mg/kg
Benzo[a]anthracene	56-55-3	0.2	0.2	ND			mg/kg
Benzo[a]pyrene (BaP)	50-32-8	0.2	0.2	ND			mg/kg
Benzo[b]fluoranthene	205-99-2	0.2	0.2	ND			mg/kg
Benzo[e]pyrene	192-97-2	0.2	0.2	ND			mg/kg
Benzo[ghi]perylene	191-24-2	0.2	0.2	ND			mg/kg
Benzo[j]fluoranthene	205-82-3	0.2	0.2	ND			mg/kg
Benzo[k]fluoranthene	207-08-9	0.2	0.2	ND			mg/kg
Chrysene	218-01-9	0.2	0.2	ND			mg/kg
Dibenz[a,h]anthracene	53-70-3	0.2	0.2	ND			mg/kg
Fluoranthene	206-44-0	0.2	0.2	ND			mg/kg
Fluorene	86-73-7	0.2	0.2	ND			mg/kg
Indeno[1,2,3-cd]pyrene	193-39-5	0.2	0.2	ND			mg/kg
Naphthalene	91-20-3	0.2	0.2	ND			mg/kg
Phenanthrene	85-01-8	0.2	0.2	ND			mg/kg
Pyrene	129-00-0	0.2	0.2	ND			mg/kg

**Sludge - Chlorotoluenes**

USEPA 3550C:2007; USEPA 8270E:2018, GC-MS

Test Parameters	CAS Number	Reporting Limit		Result			Unit
		TEXTILE	Lab	Sludge I003			
Other isomers of mono-, di-, tri-, tetra-, and penta-chlorotoluene	Multiple 95-49-8, 108-41-8, 106-43-4, 32768-54-0, 95-73-8, 19398-61-9, 118-69-4/ 95-75-0/ 25186-47-4/ 7359-72-0/ 2077-46-5/ 6639-30-1/ 23749-65-7/ 1006-32-2/ 875-40-1/ 877-11-2	0.2	0.2	ND			mg/kg



**4B) Test result - Sludge / Metals** **Sludge Disposal Pathway = C**

USEPA 3051A:2007; US EPA 6020B:2014, ICP-MS ;US EPA 7196A:1992, UV

Test Parameters	Reporting Limit		Maximum Total Metals Limits Diposal Pathway G	Threshold Values			Result			Unit
	TEXTILE	Lab					Sludge 1003			
Antimony	5	5	NA	12			NA			mg/kg
Arsenic	5	5	41	10			NA			mg/kg
Barium	200	200	500	700			NA			mg/kg
Cadmium	1	1	39	3			NA			mg/kg
Cobalt	400	400	NA	1600			NA			mg/kg
Copper	50	50	1500	200			NA			mg/kg
Lead	5	5	400	10			NA			mg/kg
Nickel	20	20	420	70			NA			mg/kg
Selenium	5	5	36	10			NA			mg/kg
Silver	50	50	NA	100			NA			mg/kg
Zinc	400	400	2800	1000			NA			mg/kg
Total Chromium	50	50	1200	100			NA			mg/kg
Chromium (VI)	20	20	50	50			NA			mg/kg
Mercury	1	1	17	1			NA			mg/kg

**Test result - Leachate / Metals** **Sludge Disposal Pathway = C**

HJ/T 300-2007; US EPA 3015A:2007; US EPA 6020B:2014, ICP-MS; US EPA 7196A:1992, UV

Test Parameters	Reporting Limit	Sludge disposal pathway							Result			Unit
	Lab	A, B, C	D	E	F	G			Leachate -			
Antimony	0.01	NA	7.8	0.6	0.6	0.6			NA			mg/L
Arsenic	0.005	NA	2.75	0.5	0.5	0.5			NA			mg/L
Barium	0.5	NA	67.5	35	35	35			NA			mg/L
Cadmium	0.01	NA	0.58	0.15	0.15	0.15			NA			mg/L
Cobalt	0.01	NA	80	80	80	80			NA			mg/L
Copper	0.25	NA	17.5	10	10	10			NA			mg/L
Lead	0.01	NA	2.75	0.5	0.5	0.5			NA			mg/L
Nickel	0.05	NA	11.75	3.5	0.5	3.5			NA			mg/L
Selenium	0.01	NA	0.75	0.5	0.5	0.5			NA			mg/L
Silver	0.005	NA	5	5	5	5			NA			mg/L
Zinc	0.5	NA	50	50	50	50			NA			mg/L
Total Chromium	0.05	NA	5	5	5	5			NA			mg/L
Chromium (VI)	0.001	NA	3.75	2.5	2.5	2.5			NA			mg/L
Mercury	0.001	NA	1.25	0.5	0.5	0.5			NA			mg/L



4C) Test result - Sludge / Conventional & Anion			Sludge Disposal Pathway = C								
Test Parameters	Test Method	Reporting Limit	Sludge disposal pathway					Result			Unit
		Lab	A, B, C	D	E	F	G	Sludge 1003			
pH	HJ 962-2018	NA	NA	5-11	5-11	6.5-9	6.5-9	NA			-
Fecal Coliform	EPA 1681:2006	-	NA	NA	NA	<1000	<1000	NA			MPN/g
% Solids	HJ 613-2011	NA	Sample & report					31.6			%
Paint Filter Test	EPA 9095B:2004	NA	NA	Pass	Pass	Pass	Pass	NA			-
Cyanide	HJ 745-2015	70	NA	85	70	70	70	NA			mg/kg


**Appendix A - Discharge limit according to regulation**
 当前位置：水污染物排放信息审核

**1、废水污染物排放许可限值**
**(1) 主要排放口**

排放口编号	排放口名称	污染物种类	许可排放浓度限值 (mg/L)
DW001	废水排放口	悬浮物	/mg/L
DW001	废水排放口	色度	/
DW001	废水排放口	氨氮 (NH <sub>3</sub> -N)	/mg/L
DW001	废水排放口	五日生化需氧量	/mg/L
DW001	废水排放口	化学需氧量	/mg/L
DW001	废水排放口	总镉	/mg/L
DW001	废水排放口	总氮 (以N计)	/mg/L
DW001	废水排放口	二氧化氯	/mg/L
DW001	废水排放口	pH值	/
DW001	废水排放口	总磷 (以P计)	/mg/L
DW001	废水排放口	苯胺类	/mg/L
DW001	废水排放口	流量	/mg/L
DW001	废水排放口	硫化物	/mg/L
主要排放口合计			CODcr
			氨氮
			总氮 (以N计)

**Appendix B - Photos of sampling points and samples (with relative time and date)**

Photo of sampling point  
25/02/2025, 8:30

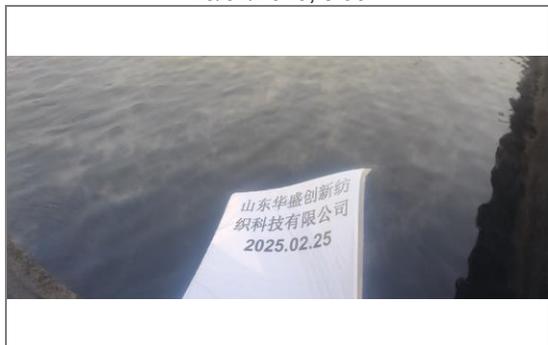

**Untreated Wastewater**

Photo of sample (labelled sample bottle)  
25/02/2025, 8:30




**Untreated Wastewater**

Photo of sampling point  
25/02/2025, 9:10



**Effluent**

Photo of sample (labelled sample bottle)  
25/02/2025, 9:10

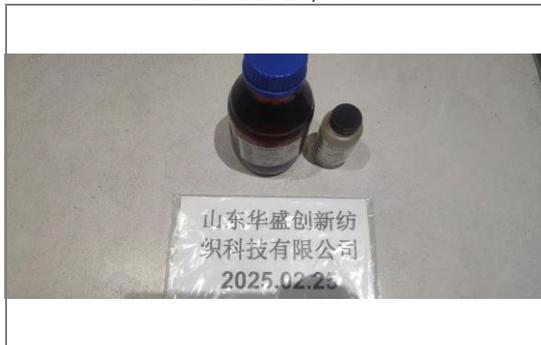

**Effluent**

Photo of persistent foam  
25/02/2025, 9:10



**Effluent**

**Appendix B - Photos of sampling points and samples (with relative time and date) (continue)**

Photo of sampling point  
25/02/2025, 10:00



**Sludge**

Photo of sample (labelled sample bottle)  
25/02/2025, 10:00



**Sludge**



BUREAU VERITAS

Report Number (6625)056-1023

Appendix C - Field Data Form

ZDHC Wastewater Sampling Field Data Form and Representative Sample Declaration		CPSD-AN-00613-DATA 07
		Issue Date:
		Version No.: 1
		Business Line: Analytical

Attach the completed field data form in the test report.

Facility Information			
Date of Sampling: 采样日期	2025.2.25		
Sample Number / Test Report Number (ZDHC Composite Sample Code): 报告号	66250561023		
Facility Name: 工厂名称	山东华蓝创新纺织科技有限公司		
Facility Address: 工厂地址	山东省滨州市无棣县经二路西首湖五路		
Facility Type (tick all applicable): 工厂类型	<input checked="" type="checkbox"/> Dyeing and Finishing 染整 <input type="checkbox"/> Fabric Mill 面料厂 <input type="checkbox"/> Laundry, Washing and Finishing 洗衣, 水洗, 整理 <input type="checkbox"/> Natural Leather processing 天然皮革加工 <input checked="" type="checkbox"/> Printing 印花 <input type="checkbox"/> Synthetic Leather processing 合成革加工 <input type="checkbox"/> Other (please specify) 其他 (请注明)		
Discharge Type (tick applicable): 排放类型	<input type="checkbox"/> Direct discharge 直接排放 <input type="checkbox"/> with pre-treatment 有预处理 <input checked="" type="checkbox"/> Indirect discharge 间接排放 <input type="checkbox"/> without pre-treatment 没有预处理 <input type="checkbox"/> Zero liquid discharge (ZLD) 零液体排放 <input type="checkbox"/> with own ETP 拥有自己的污水处理厂 Other Notes: 另注		
Discharge Description: 排放说明	<input type="checkbox"/> Discharge to environment (e.g. river/河流, stream/溪流, sea etc/海洋) <input type="checkbox"/> Other (please specify) 其他 (请注明) <input checked="" type="checkbox"/> Sewage treatment plant 污水处理厂		
Discharge Volume: 排放量	<input checked="" type="checkbox"/> $\geq 15m^3$ per day $\geq 15m^3$ <input type="checkbox"/> $< 15m^3$ per day $< 15m^3$		

Sample Type and Details 样品类型和详细信息	
Sample Type	Sample Details
<input type="checkbox"/> Incoming Water 进水	
<input type="checkbox"/> Untreated WW 未处理	<input checked="" type="checkbox"/> with equalisation tank (EQT) present 存在均衡池 (EQT) Hydraulic Retention Time (HRT) (Hours): 水力停留时间 (HRT) (小时) 7/2 容积 5000 m <sup>3</sup> 均衡池 5000 m <sup>3</sup> = volume of tank (m <sup>3</sup> ) / flow rate (m <sup>3</sup> /h) if HRT > 12 h, grab sampling from EQT is allowed.
<input type="checkbox"/> Effluent 排放物	<input type="checkbox"/> Direct 直接排放 <input checked="" type="checkbox"/> Indirect 间接排放 Enter sampling time(s) in page 2 and take field test measurements. 在第2页中输入采样时间, 并进行现场测试测量。 <input type="checkbox"/> Facility has WWTP 工厂拥有污水处理厂 <input checked="" type="checkbox"/> with equalisation tank (EQT) present 存在均衡池 (EQT) <input type="checkbox"/> Plant is in operating condition 工厂处于运行状态 Hydraulic Retention Time (HRT) (Hours): 水力停留时间 (HRT) (小时) 7/2 = volume of tank (m <sup>3</sup> ) / flow rate (m <sup>3</sup> /h) if HRT > 12 h, grab sampling from EQT is allowed. 容积 2850 m <sup>3</sup>
<input type="checkbox"/> Sludge 污泥	Disposal Pathway 处置途径 (The pathway must be defined by the facility. If the facility cannot provide information, pathway "F" shall be assumed.) <input type="checkbox"/> A >1000°C 场外焚烧 <input type="checkbox"/> B 有重大控制措施的填埋 <input checked="" type="checkbox"/> C 建筑材料加工 >1000°C <input type="checkbox"/> D 有限制控制的填埋 <input type="checkbox"/> E 废物/建筑材料加工 <1000°C <input type="checkbox"/> >1000°C offsite incineration <input type="checkbox"/> Landfill with significant control <input type="checkbox"/> Building products processed >1000°C <input type="checkbox"/> Landfill with limited control <input type="checkbox"/> Incineration/ Building products <input type="checkbox"/> F 无控制措施的填埋 <input type="checkbox"/> G 土地施用 <input type="checkbox"/> Landfill with no control <input type="checkbox"/> Land application Sludge flux (weight/time) if applicable: 污泥流量 (重量/时间) (如适用)

ZDHC Wastewater Sampling - Facility Confirmation ZDHC 废水取样-设施确认			
The wastewater samples have been collected under the facilities' normal production scale and wastewater flow rate. The sampler listed below was on-site and collected the samples. Sampling protocol for wastewater and sludge samples are in accordance with ZDHC SAP including appendix E. 废水样本是在工厂的正常生产规模和废水流速下采集的。下面列出的采样器在现场采集了样本。废水和污泥样品的取样方案符合 ZDHC SAP, 包括附录 E。 In no circumstances shall samples be taken during times when the production process is not running or the wastewater is diluted, for example due to heavy rainfall. 在任何情况下, 当生产过程未运行或废水被稀释时, 例如由于强降雨, 都不得取样。			
Facility Confirmation		Sampler Information	
Facility Name: 工厂名		Sampler's Name/ Email: 采样员姓名/电子邮件	
Facility Representative Name: 工厂负责人		Sampler's ZDHC Accredited No.: 采样员的 ZDHC 证书编号	
Facility Representative Signature and Stamp: 工厂代表签名及盖章		Sampler's Signature: 采样员签名	杨伟法
Date: 日期		Date: 日期	2025.2.25



BUREAU VERITAS

Report Number (6625)056-1023

Appendix C - Field Data Form (continue)

ZDHC Wastewater Sampling Field Data Form and Representative Sample Declaration										GPSD-AN-00613-DATA 07	
ZDHC 废水取样现场数据表和代表样品声明										Issue Date:	
										Version No.: 1	
										Business Line: Analytical	
ZDHC Wastewater Flow Device Dimensions ZDHC 废水流量设备参数											
Measurement (cm) 测量 (cm)	Meter 仪器	Pipe (O) 管道	Flume (U) 渠渠	Wier (V) 堰							
Diameter 直径	--	--	--	--							
Depth 深度	--	--	--	--							
ZDHC Wastewater Sampling Field Testing QA/QC ZDHC 废水取样现场测试 QA/QC											
Parameter 参数	Lab Control Sample (LCS) Known 实验室控制样品	Lab Control Sample (LCS) Measured 实验室对照样品 (LCS) 测量	Accuracy (%) 准确度								
pH											
Total Chlorine 总氯											
ZDHC Wastewater Sample Collection Field Test Measurements ZDHC 废水水收集现场测试测量											
Incoming Sample Point 进水采样点	<input type="radio"/> Composite Sample 混合采样 <input type="radio"/> Grab Sample 瞬时采样		Start Time: 开始时间	Stop Time: 停止时间							
Sampling Locations: 采样位置	GPS coordinates: GPS 坐标 Lat.: N / S		Long.: E / W								
Sampling Mode: 采样方式	<input type="radio"/> Manual 手动 <input checked="" type="radio"/> Autosampler 自动采样器		Sampling Device Description/ Owner: 采样设置描述								
Sampling Time (Hours) 采样时间 (小时)	0	1	2	3	4	5	6	Average 平均的			
Recording time of discrete sample 记录离散样本的时间											
Colour (visual estimation): 颜色 (视觉估计)											
Untreated Sample Point 未处理的采样点	<input type="radio"/> Composite Sample 混合采样 <input checked="" type="radio"/> Grab Sample 瞬时采样		Start Time: 8:00	Stop Time: 11:30							
Sampling Locations: 采样位置	GPS coordinates: GPS 坐标 Lat.: N / S 37°44'16.12"		Long.: E / W 117°38'31.23"								
Sampling Mode: 采样方式	<input checked="" type="radio"/> Manual 手动 <input type="radio"/> Autosampler 自动采样器		Sampling Device Description/ Owner: 采样设置描述								
Sampling Time (Hours) 采样时间 (小时)	0	1	2	3	4	5	6	Average			
Recording time of discrete sample 记录离散样本的时间	8:30										
Colour (visual estimation): 颜色 (视觉估计)	深绿										
Effluent Sample Point 排放废水采样点	<input type="radio"/> Composite Sample 混合采样 <input type="radio"/> Grab Sample 瞬时采样		Start Time: 8:00	Stop Time: 11:30							
Sampling Locations: 采样位置	GPS coordinates: GPS 坐标 Lat.: N / S 37°44'16.12"		Long.: E / W 117°38'31.23"								
Sampling Mode: 采样方式	<input type="radio"/> Manual 手动 <input type="radio"/> Autosampler 自动采样器		Sampling Device Description/ Owner: 采样设置描述								
Sampling Time (Hours) 采样时间 (小时)	0	1	2	3	4	5	6	Average			
Recording time of discrete sample 记录离散样本的时间	9:10										
Temperature (°C): 温度	WW Discharge 排放废水	Receiving Water 接收水体									
pH:	7.2										
Dissolved Oxygen (mg/L): 溶解氧	7.39										
Total Chlorine (mg/L): 总氯	0.03										
Persistent Foam (Yes/No): 持久泡沫	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No	Yes / No
Wastewater Flow Meter (L/min): 流速	347.4/mh										
Alternate Measured Flow: 替代测量流量	Depth (cm) 深度 (厘米)	Velocity (cm/sec) 流速 (厘米/秒)									
Colour (visual estimation): 颜色 (视觉估计)	清绿										
Volume collected (L): 收集的体积 (L)	4.8 L										
Total volume collected (L): 收集的总体积 (L)	4.8 L @ 0.75L										
Collect 3.33-litres each hour for a total minimum volume of 20-litres 每小时收集 3.33L，以确保总收集量至少为 20L											
Sludge Sample Point 污泥采样点	<input type="radio"/> Composite Sample 混合采样		Start Time: 8:00	Stop Time: 11:30							
Sampling Locations: 采样位置	GPS coordinates: GPS 坐标 Lat.: N / S		Long.: E / W								
Sampling Mode: 采样方式	<input checked="" type="radio"/> Manual 手动 <input type="radio"/> Autosampler 自动采样器		Sampling Device Description/ Owner: 采样设置描述								
Sampling Time (Hours) 采样时间 (小时)	0	1	2	3	4	5	6	Average			
Recording time of discrete sample 记录离散样本的时间	10:00										
Colour (visual estimation): 颜色 (视觉估计)	棕黑色泥状										
Comments/ Other Observations 其他备注											
污泥无滑液											